


**USE ONLY 2 PEOPLE  
TO ERECT THE SHELTER**

**USE ONLY 2 PEOPLE  
TO ERECT THE SHELTER**

## How to setup your sidewalls

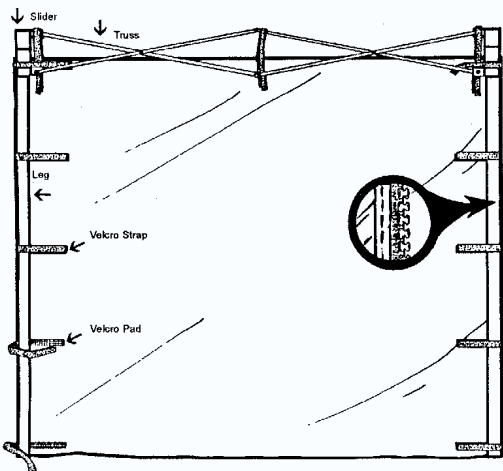

Attach sidewall to frame as shown. Wrap side velcro straps around leg and long velcro straps around truss and press into velcro pad

**Note:** Top of wall tucks underneath valance of the top just an inch or two!

You can vary the height of the sidewall by adjusting the long straps at the top of the sidewall. Sidewalls have zippers on both sides to fully enclose your shelter with four sidewalls if desired.


Do not fit the sidewall touching the roof which is too high - Leave a small gap at the top so that it fits in the middle of the diamond shape.

## IMPORTANT INFORMATION

- WINDY CONDITIONS:** Tether with both guying kit and stakes or the weight bags.  
**STRONG WIND:** Take shelter down  
**HEAVY RAIN OR SNOW:** Ensure roof does not fill with rain or snow or take it down.  
**WET FABRIC:** Let the shelter dry before closing up and storing.  
**CLEANING:** By hand with mild detergent/cold water & wash off within a few minutes.

### Do NOT leave unattended

If in doubt, always use the tethering systems for your and other peoples safety.

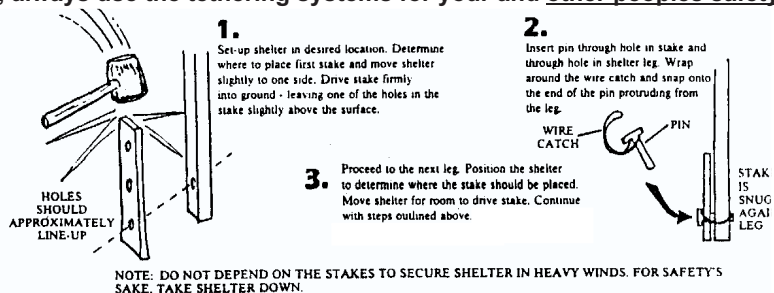

**WARNING:** In Heavy Rain or Snow, ensure that the roof does not collect with an excess of water or snow, the weight of which may overload the frame.

# Instant<sup>POP UP</sup> Shelters<sup>TM</sup>

The worlds quickest shelters - Up in 60 seconds

Units 1-3, Gowt Bank Lane. Wrangle. Boston. Lincolnshire PE22 9BZ England

Tel: 01205 871123


Visit our Website at : [www.instantpopupshelters.co.uk](http://www.instantpopupshelters.co.uk)

## SHELTER INSTRUCTIONS

### FITTING THE ROOF



Place the shelter in the centre of the area you wish to cover. Fit the top onto the frame and align the velcros on the top of the frame leg to velcro sewn into the four corners of the roof.



The roof now stays on for good (*EXCEPT printed roofs* which need careful and neat folding to prevent damage to printing) - Bungee ties are fitted in case of blowy weather lifting the top but unhook before folding away.

### GUYING INSTRUCTIONS

#### 1. Attaching the Guy Ropes

a. Push the looped end of the guy rope through the either the black plastic d loops at the corner of the roof, or the NEW BLACK FABRIC LOOP on the corner of the valance. Then thread the rest of the rope through the loop in the rope.

b Pull the guy rope down to the 12" peg which should be hammered into the ground at an angle away from the shelter and tension the guy rope by sliding the runner up the guy rope until it is taught. Do this on each leg.

**IMPORTANT:** Please use a bright marker or white tissue to make the 12" ground pegs more obvious and so prevent someone tripping over them.


c. On hard standing or with weight bags - fix the ropes to either the bags or if safe, a fence or other fixing point that may help hold the shelter down. You can also suspend extra weight bags via guy ropes for extra stability

#### 2. Cross Guying


If you do not have the room to guy your shelter in the normal way, you can use the cross guying method as shown in the diagram below.

**Note:** Always use the PEG Extractor Hook when removing pegs. To remove the huge stakes, lightly tap sideways on the thin edge of the stake to cut sideways into the ground until loose.


**Always get the guy ropes fitted as soon as possible! You may need to consider an extra guying kit if in a very blowy position.**



Roof Anchor D LOOPS




Guy rope over the 12 inch peg

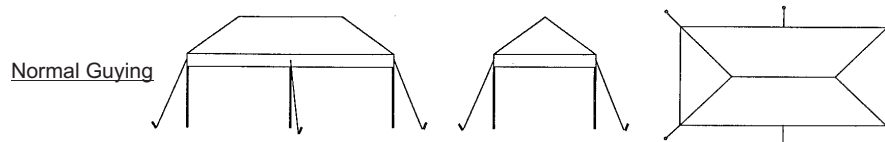

Normal Guying

Cross Guying

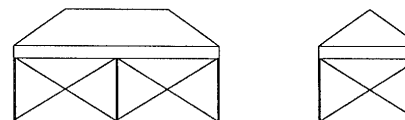

**TIP:** Try to fix all the sidewalls 1st, then stake one leg at a time, stretching out each leg one at a time in sequence clockwise. In gusty weather fit GUYS FIRST OF ALL!

Visit our Website at : [www.instantpopupshelters.co.uk](http://www.instantpopupshelters.co.uk)